





64.A


64.B

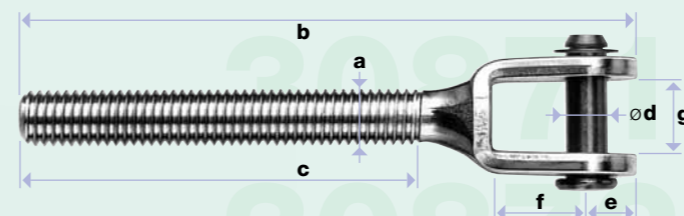


**R** Right-hand thread  
**L** Left-hand thread

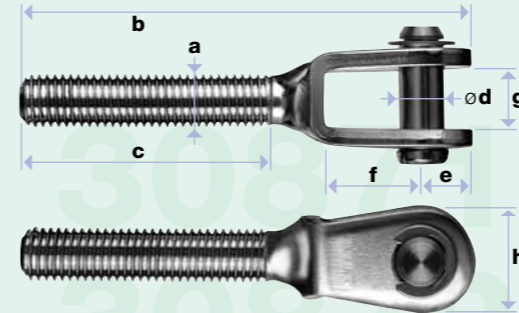

**R** Right-hand thread  
**L** Left-hand thread

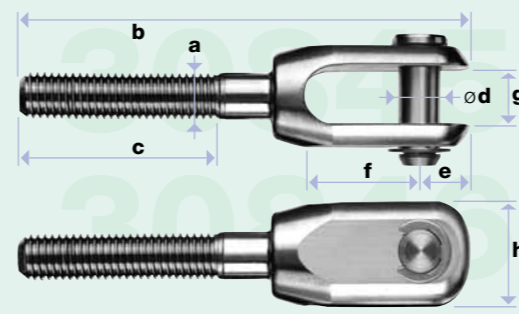

← ⊕ →  
→ ⊖ ←

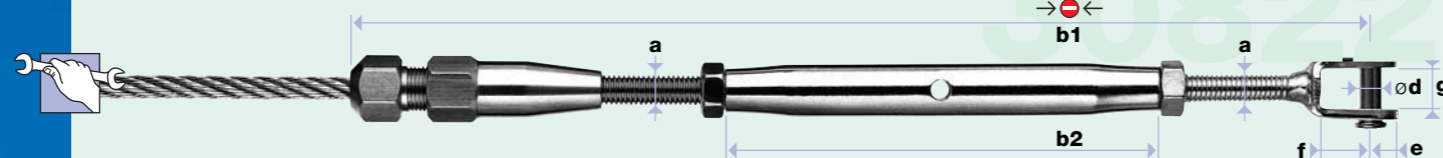

**⊕ ⊖ Tensioning range** information: the external thread ends are screwed halfway into the turnbuckle body on both sides.  
**Caution:** the min. screw insertion depth is 1.5 x thread  $\phi$  (M8 = 12 mm).  
← ⊕ → = Make longer (relax)  
→ ⊖ ← = Make shorter (tension)

**⊗** Not suitable for stranded wire rope  
**No.10810-**

**Assembly:**  
The rope must protrude by 8 mm on the wedge side.



**The user is responsible** for choosing the proper rope  $\phi$  and for correct assembly. Functionality is guaranteed only by Jakob rope **No. 10820-** with code filament.

Technical data subject to change.  
All rights reserved. © 1988/06 by Jakob AG Switzerland.

Technical data subject to change.  
All rights reserved. © 1988/02 by Jakob AG Switzerland. Rev. 2

CLEVIS WITH EXTERNAL THREAD

1.4404  
AISI 316

no. <b>R</b>	no. <b>L</b>		a	b	c	$\phi$ d	e	f	g	h
30871-	30872-									
0500	0500	M5	66	41	5,0	6,0	12	7,5	12,5	
0600	0600	M6	73	47	5,0	6,0	12	7,5	12,5	
0800	0800	M8	86	57	6,0	7,0	13	10,0	14,5	
1000	1000	M10	98	63	8,0	9,0	15	11,0	18,0	
1200	1200	M12	132	80	12,0	14,0	25	14,0	26,0	
1400	1400	M14	143	90	12,0	14,0	25	14,0	26,0	
1600	1600	M16	166	100	14,0	18,0	32	22,0	34,0	
2000	2000	M20	212	120	19,0	22,0	40	24,0	43,0	
2400	2400	M24	266	165	25,4	35,3	40	25,4	57,0	

CLEVIS WITH SHORT EXTERNAL THREAD

1.4404  
AISI 316

no. <b>R</b>	no. <b>L</b>		a	b	c	$\phi$ d	e	f	g	h
30871-	30872-									
0500-01	0500-01	M5	55	30	5	6	12	7,5	12,5	
0600-01	0600-01	M6	56	30	5	6	12	7,5	12,5	
0800-01	0800-01	M8	64	35	6	7	13	10	14,5	

MONOFORK WITH EXTERNAL THREAD

1.4404  
AISI 316

no. <b>R</b>	no. <b>L</b>		a	b	c	$\phi$ d	e	f	g	h
30845-	30846-									
0600	0600	M6	80	45	6	7,0	18,0	8	16,0	
0800	0800	M8	100	60	8	8,5	20,5	10	18,0	
1000	1000	M10	135	80	9	10,5	25,5	12	21,5	

Other sizes see NEWS catalogue.

MONOFORK WITH SHORT EXTERNAL THREAD

1.4404  
AISI 316

no. <b>R</b>	no. <b>L</b>		a	b	c	$\phi$ d	e	f	g	h
30845-	30846-									
0600-01	0600-01	M6	65	30	6	7,0	18,0	8	16	
0800-01	0800-01	M8	75	35	8	8,5	20,5	10	18	

TURNBUCKLE WITH SCREWED CLEVIS

1.4404  
AISI 316

**For on-site assembly** / Patent / DBGM pending  
**Breaking strength:** 90% of min. rope breaking load

no.	$\phi$ mm	a	b1	b2	$\phi$ d	e	f	g	h	⊕ Range	⊖
30822-											
0200	2,0	M6	226	92	5	6	12	7,5	12,5	28	40
0300	3,0	M6	226	92	5	6	12	7,5	12,5	28	40
0400	4,0	M6	226	92	5	6	12	7,5	12,5	28	40
0500	5,0	M8	262	112	6	7	13	10,0	14,5	34	50
0600	6,0	M8	262	112	6	7	13	10,0	14,5	34	50

Measure assembly lengths like this:

